


XXL

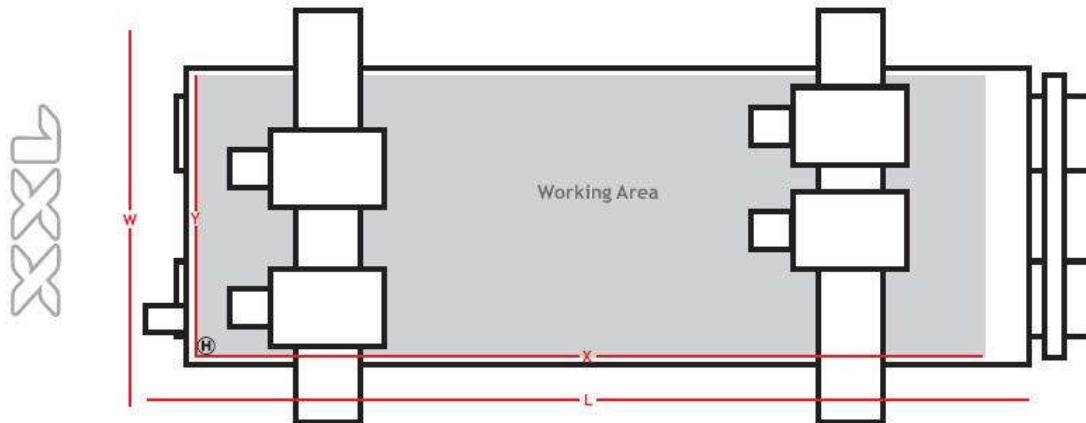

Specifications

Z-Axis Travel:	11", 280mm
Z-Axis Clearance:	11", 280mm
Max Cutting Speed:	XY 2400 ipm, 1016mm/s
Max Rapid Traverse*:	XY 3600 ipm, 1.5m/s
Resolution X/Y:	0.00004", 0.001mm
Resolution Z:	0.000016", 0.0004mm
Repeatability:	+/- 0.002", +/- 0.05mm

Standard Features

- Standard bed lengths up to 55ft, contact FlexiCAM for larger sizes
- Available machine width 8ft - 10ft - 12ft / 2.5m - 3m - 3.5m
- Up to 4 gantries
- Up to 8 tooling positions for any combination of spindles or boring units at each tool plate
- Available with up to an optional 35 positions for tool holders
- High Precision Rack and Pinion Drive on X and Y axis, designed to handle high accelerations & decelerations
- Ballscrew Drive on Z-Axis
- Extremely-High Speed Servo Drive systems
- Air Floatation Load Unload Systems